

2MP WDR Starlight IR Network Indoor MiniPTZ Dome Camera

IPC6412LR-X5UPW-VG



Key Features



- High quality image with 2MP, 1/2.7" CMOS sensor
- 1920*1080@30fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 5X optical zoom allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- Face capture, automatic selection of best snapshots
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Wi-Fi connection and easy installation
- Built-in Mic & Speaker, support two-way audio
- Alarm 1 in and 1 out
- Smart IR, up to 30m (98 ft) IR distance

Specifications

IPC6412LR-X5UPW-VG					
Camera					
Sensor	1/2.7", 2.0 megapixel, progressive scan, CMOS				
Min. Illumination	Colour:0.003 lux (F1.2, AGC ON) 0 lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Shutter	Auto/Manual, 1 ~ 1/100000s				
WDR	120dB				
S/N	> 52dB				
Lens					
Lens type	2.7~13.5mm@F1.2, AF automatic focusing and motorized zoom lens				
Iris	Auto aperture				
Angle of View (H)	30.6°~106.9°				
Angle of View (V)	17.7°~56.0°				
Angle of View (O)	37.6°~139.0°				
DORI					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	2.7	70.9(232.5ft)	28.4(93.0ft)	14.2(46.5ft)	7.1(23.3ft)
	13.5	247.5(812.0ft)	99.0(324.8ft)	49.5(162.4ft)	24.8(81.2ft)
Illuminator					
IR Range	Up to 30m (98 ft) IR range				
Wavelength	850nm				
IR On/Off Control	Auto/Manual				
Video					
Video Compression	Ultra 265, H.265, H.264, MJPEG				
Frame Rate	Main Stream: 2MP (1920*1080),Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; Third Stream: D1 (720*576), Max 30fps				
Video Bit Rate	128 Kbps~16 Mbps				
H.264 Type	Baseline Profile/Main Profile/High Profile				
H.265 Type	Main Profile				
U-code	Support				
ROI	Up to 8 areas				
Video stream	Triple streams				
OSD	Up to 8 OSDs				
Privacy Mask	24 areas, up to 4 blacks in the same picture				
Image					
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2				
Digital noise reduction	2D/3D DNR				
Smart IR	Support				
Flip	Normal/Flip Vertical/Flip Horizontal/180°				
HLC	Support				
BLC	Support				
Defog	Digital Defog				

Intelligent

Smart intrusion prevention	Support false alarm filtering: Line crossing detection, Intrusion detection, Region entrance detection, Region exit detection;
----------------------------	--

Recognition	Face capture;
-------------	---------------

Events

Basic Detection	Motion detection, Audio detection, Tampering alarm;
-----------------	---

General Function	Watermark, IP Address Filtering, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
------------------	---

Audio

Audio Compression	G.711U, G.711A
-------------------	----------------

Audio Bitrate	64 Kbps
---------------	---------

Two-way Audio	Support
---------------	---------

Suppression	Support
-------------	---------

Sampling Rate	8KHZ
---------------	------

Storage

Edge Storage	Micro SD, up to 256 GB
--------------	------------------------

Network Storage	ANR,NAS(NFS)
-----------------	--------------

Network

Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP, SSL/TLS
-----------	---

Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API, SDK
------------------------	---

User/Host	Up to 32 users. 2 user levels: administrator and common user
-----------	--

Security	Password protection, strong password, HTTPS encryption, basic and digest authentication for RTSP, digest authentication for HTTP, TLS 1.2, WSSE and digest authentication for ONVIF
----------	---

Client	EZStation EZLive Ezview
--------	-------------------------------

Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
-------------	---

Pan & Tilt

Pan Range	350°
-----------	------

Pan Speed	0.1°/s ~ 60°/s Preset speed: 60°/s
-----------	---------------------------------------

Tilt Range	0° ~ 90°
------------	----------

Tilt Speed	0.1° ~ 50°/s Preset speed: 50°/s
------------	-------------------------------------

Number of Presets	1024
-------------------	------

Patrol	Preset patrol
--------	---------------

Preset Image Freeze	N/A
---------------------	-----

Home Position	Support
---------------	---------

Interface

Audio I/O	N/A
-----------	-----

Alarm I/O	1/1
-----------	-----

Serial Port	1 RS485
-------------	---------

Built-in Mic	Support
--------------	---------


Built-in Speaker	Support
------------------	---------

WIFI	Support (IEEE802.11b/g/n)
------	---------------------------

Network	1 * RJ45 10M/100M Base-TX Ethernet
---------	------------------------------------

Video output	N/A
Certification	
EMC	FCC Part 15 EN 55032:2015 EN 55024:2010 EN 61000-3-2:2014 EN 61000-3-3-2013
Safety	IEC 62368-1 EN 62368-1 UL 60950-1
Environment	CE-ROHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU); REACH (Regulation (EC) No 1907/2006)
Protection	N/A
General	
Power	DC12V(±25%), PoE(IEEE 802.3at)
	Power consumption: Max 15W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions (Ø x H)	Ø129 x 143.6mm (Ø5.1" x 5.7")
Weight	0.76kg(1.67lb)
Working Environment	-10°C~50°C(14°F ~ 122°F) , Humidity: ≤95% RH (non-condensing)
Storage Environment	-40°C~70°C(-40°F ~ 158°F) , Humidity: ≤95% RH (non-condensing)
Surge protection	2KV
Vandal Resistant	N/A
Ingress Protection	N/A
Reset Button	Support

Dimensions

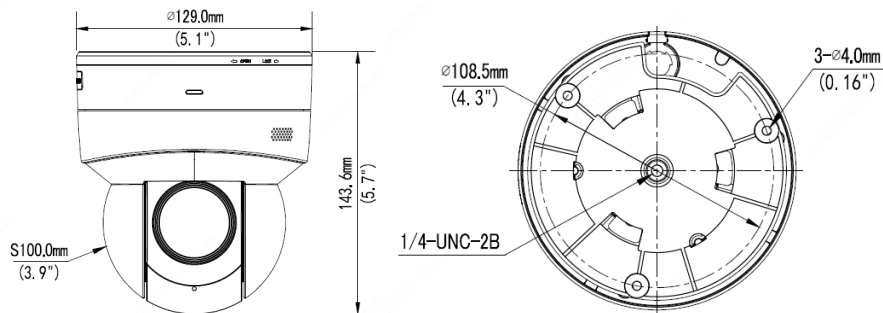

Accessories

TR-JB03-H-IN



TR-JB07/WM03-F-IN



TR-WM03-B-IN



TR-A01-IN



TR-UP06-IN

TR-SE24-IN

TR-SE24-A-IN

TR-CM24-IN



Junction Mount	Wall mount
TR-JB03-H-IN + TR-A01-IN	TR-JB07/WM03-F-IN、TR-WM03-B-IN+TR-UP06-IN
Pendent Mount	
TR-JB03-H-IN+ TR-SE24-IN/TR-SE24-A-IN+ TR-CM24-IN	/
	/

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice