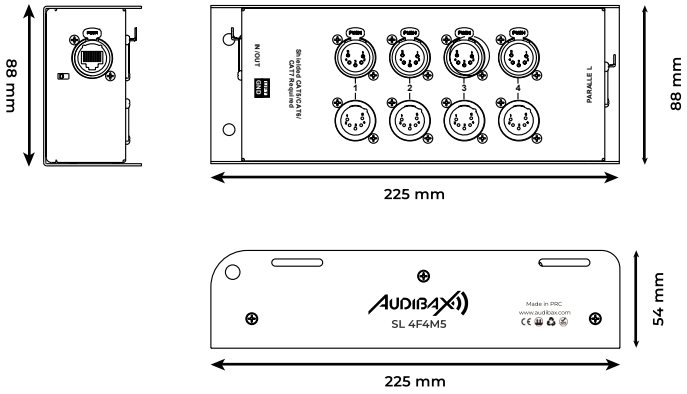
SL 4F4M5
Data Sheet





GENERAL INFORMATION

Model	SL 4F4M5
ID	10330590
Brand	Audibax
EAN	**8436850181897**
Colour	Black
Intrastat	85369010
Category	Stage Boxes

CONTROL AND OPERATION

Type of Control	Passive
Protocols Supported	DMX-512, Analog Audio, AES/EBU
Channels and Virtual Channels	4 channels
Manual Control Options	Ground/Lift switch

PHYSICAL AND INSTALLATION DETAILS

Mounting & Installation Options	Portable stage box for floor or surface mounting (Split Box)
Housing & Build Quality	Heavy-duty metal chassis with metal flanges. Professional stage build.

SOLUTIONS

Solutions	Passive DMX/Audio Splitter

CONNECTIVITY AND INTERFACES

Connector Type 1	2xRJ45 / EtherCON (INPUT-OUTPUT)
Connector Type 2	4 x 5-pin XLR (Female) + 4 x 5-pin XLR (Male)
Inputs Line	1
Outputs Line	8
Shield	Requires shielded SFTP CAT5/CAT6/CAT7 connection cable to ensure shared earthing

PHYSICAL

Weight Single (Kg)	0.88
Dimensions (L x W x H)	22.5 x 5.5 x 8.8 cm

SHIPPING

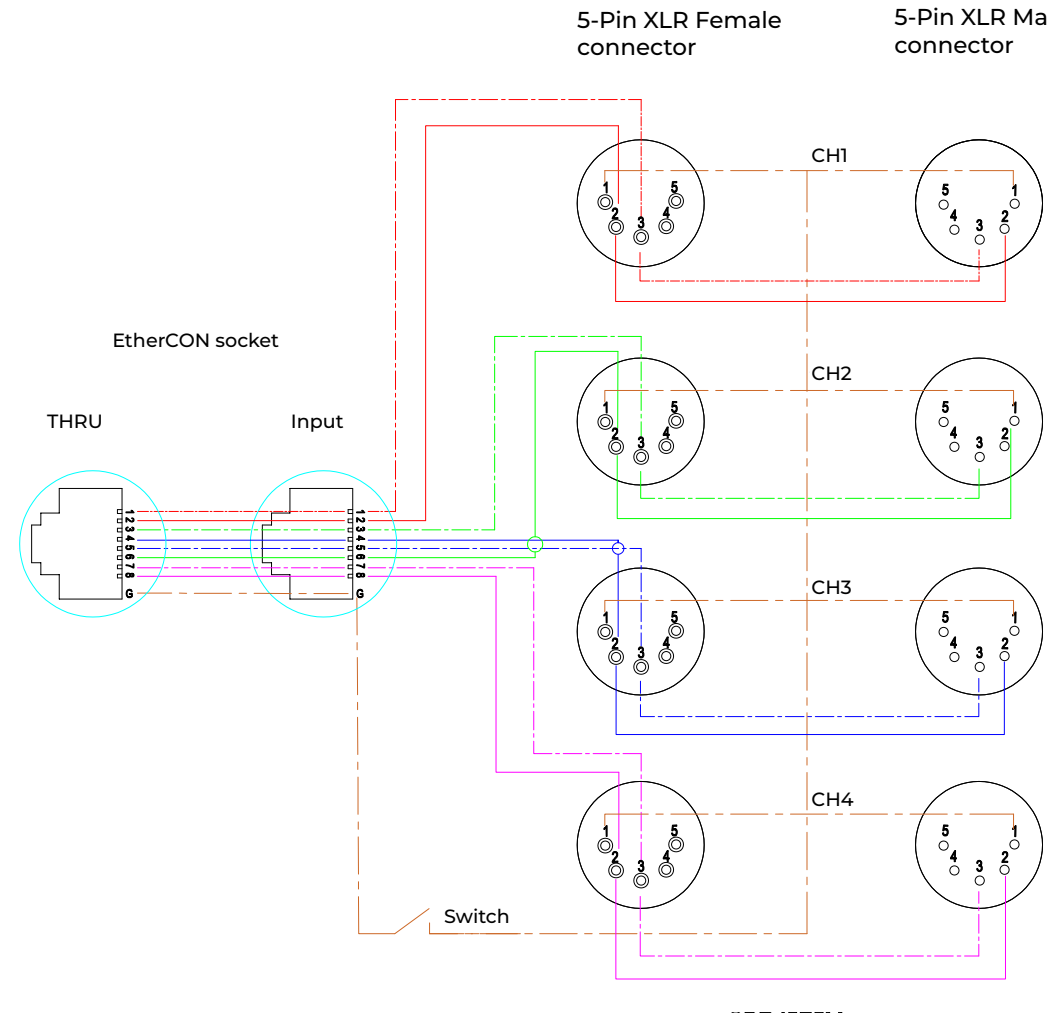
Weight (Kg)	0.93
Dimensions (L x W x H)	10.5 x 7 x 25 cm
Master carton	
Weight (Kg)	18.8
Dimensions (L x W x H)	45 x 38 x 28 cm
Units per master carton	20

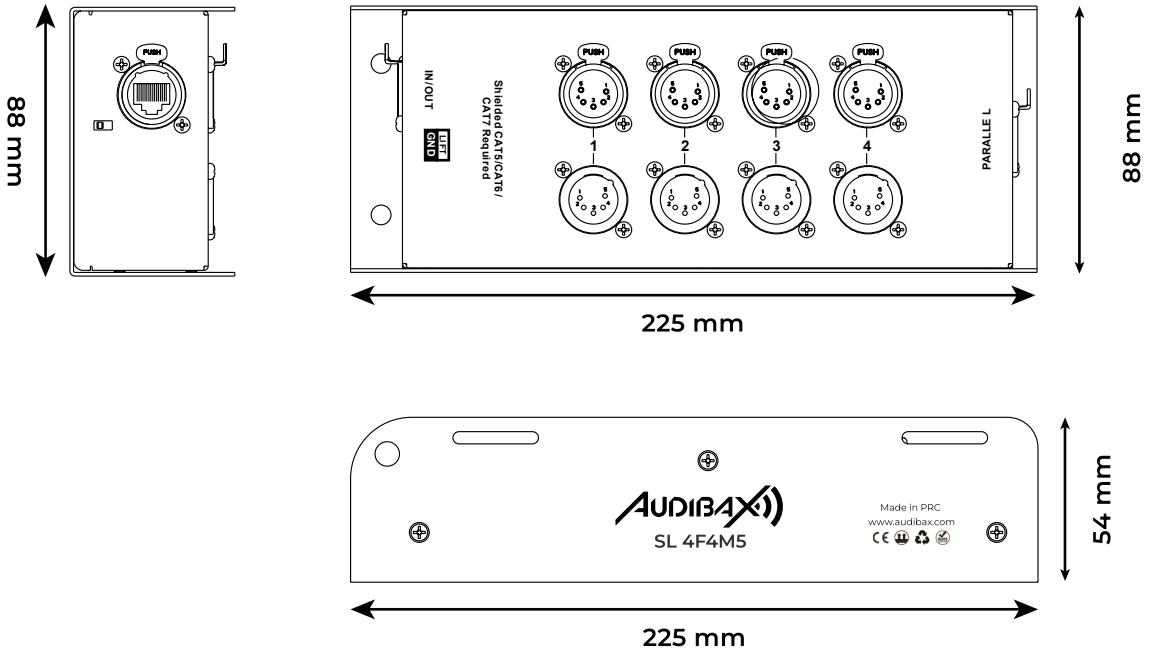
WHAT IS IN THE BOX

1x SL 4F4M5
1x Manual

CERTIFICATIONS / APPROVALS

Certifications	CE, ROHS


5-Pin XLR Female connector
5-Pin XLR Male connector
CH1
CH2
CH3
CH4
EtherCON socket
THRU
Input
Switch


88 mm
IN / OUT
Shielded CAT5/CAT6/ CAT7 Required
PUSH
PARALLE L
88 mm
225 mm
AUDIBAX
SL 4F4M5
Made in PRC
www.audibax.com
54 mm
225 mm