BATTERY RECHARGE

The speaker has an internal, rechargeable battery capable of up to 6 hours of continuous audio on a full charge. Even though the speaker may have some charge when first taken out of the box, we recommend full charging your speaker before using the system. To charge the battery:
1. Connect the speaker to a power outlet using the included power adapter.
2. Keep it plugged in until the indicator changes to 100%, that's well charged. The speaker utilizes a sealed lithium battery. When not in use, the battery will slowly self-discharge. If you not use the speaker for long time, it should in full charge before storing. Better to charge the unit every six months if no use. It will be good and longer to use. If the battery is in low charge, impossible to recharge the battery, but the charge time is 6 hours more.

BLUETOOTH INSTRUCTIONS

Single speaker Bluetooth Pairing:
1. Turn on the power of the speaker, make sure the channel 3 'AUX/MP3' button are selected to MP3 mode. Press the 'MODE' (Interchange) button on the MP3 to Bluetooth. Screen message ('bt') It will be discoverable as
'Roma 80 Go'.
2. In the setting of your Bluetooth enabled devices, set it to 'discover' available devices. From the Bluetooth device list, select the 'Roma 80 Go' device.
3. The speaker is now paired with your Bluetooth enabled device.
Two speakers Bluetooth Pairing (TWS linking):
The system support 'True Wireless Stereo' linking which allows you to connect the other speaker by Bluetooth.
1. Turn on the power of the first speaker (Master speaker), make sure the channel 3 'AUX/MP3' button are selected to MP3 mode.
2. Press 'MODE' button to interchange Bluetooth function (screen 'bt')
3. Turn on the power of the second speaker (Slave speaker), make sure the channel 3 'AUX/MP3' button are selected to MP3 mode.
4. Press 'MODE' button (slave speaker) to interchange Bluetooth function (screen message 'bt')
5. Press 'BT PAIR' (master speaker) then both of the screen message on master and slave speaker will change to be 'bt:bt' and you will hear a prompt tone, the two speakers will pair automatically.
6. Connect your Bluetooth audio device to the master speaker and enjoy the 'TRUE WIRELESS STEREO' sound.
Note: The two speakers are identical to each other, either one can be used as master or slave speaker.


Technical Information
Mechanical
LF Size: 6.5" Carton Dimension: 35.1 x 31 x 42.2 cm
HF Size: 3*3" Gross Weight: 8.5kg

AUDIBAX

Roma **80 Go**

Please read the manual before using the product

OPERATION

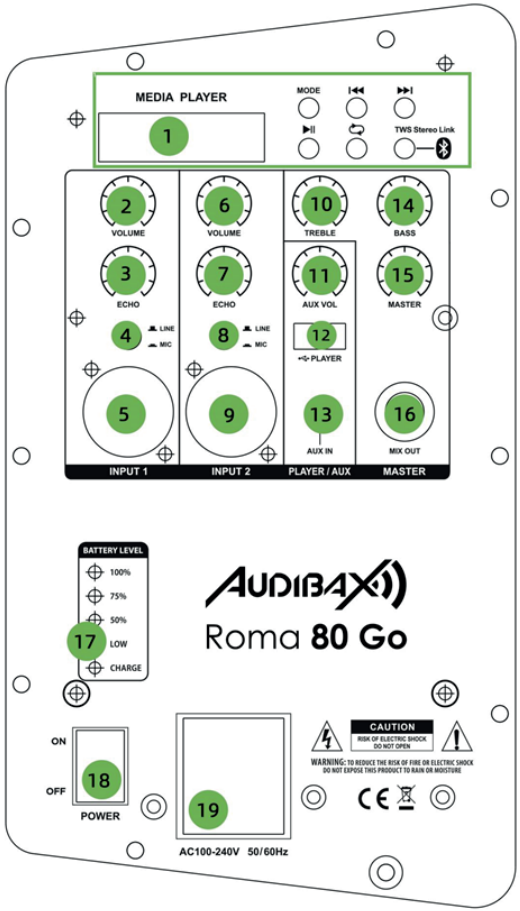

Functions

1. MP3 Player

MODE	Exchange between: USB/ SD/ BLUETOOTH REMOTE CONTROL
⏯	Play/Pause
🔁	Repeat
⏮	Last
⏭	Next
TWS Stereo Link	Connecting two sets by TWS stereo link

2. Volume: The first channel volume control
3. Echo: The first channel Echo volume control
4. The first channel Line/Mic Input choose
5. Input: The first channel Combo Line/Mic input
6. Volume: The second channel volume control
7. Echo: The second Echo volume control
8. The second channel Line/Mic Input choose
9. Input: The second channel Combo Line/Mic input
10. Treble: Treble volume control
11. MP3 AUX VOL:MP3 and AUX input volume control
12. USB: USB input
13. AUX input: IPOD /MP3 input
14. Bass: Bass volume control
15. Master Volume: all channel volume control
16. Mix out
17. Battery charge level indicators
18. Power switch: It allows to switch on / off the unit
19. Main supply inlet: Connect an IEC main power cable to supply the unit

SYSTEM CONFIGURATIONS

The versatile Roma 80 Go system operates in different unique modes. Use the examples below to quick identify the best mode for your applications.

Tilt-Back (On floor)
For performance where your audience is close to you, tilt the Roma 80 Go onto its back edge. For best results, the performer should stand or sit to one side of the cabinet to avoid blocking sound from the audience.



Monitor (On floor)
To use the Roma 80 Go as a professional floor monitor, place it on the ground horizontally, in front of and pointing toward the performer. Tilt the cabinet onto its side edge.



Stand (On speaker stand, table etc.)
Put the Roma 80 Go on a speaker stand, table or other elevated surface for general-purpose sound reinforcement.

